

## Thyristor-Diode Module, 175 Amps

**Features**

- Improved glass passivation for high reliability
- Exceptional stability at high temperatures
- High di/dt and dv/dt capabilities
- Low thermal resistance



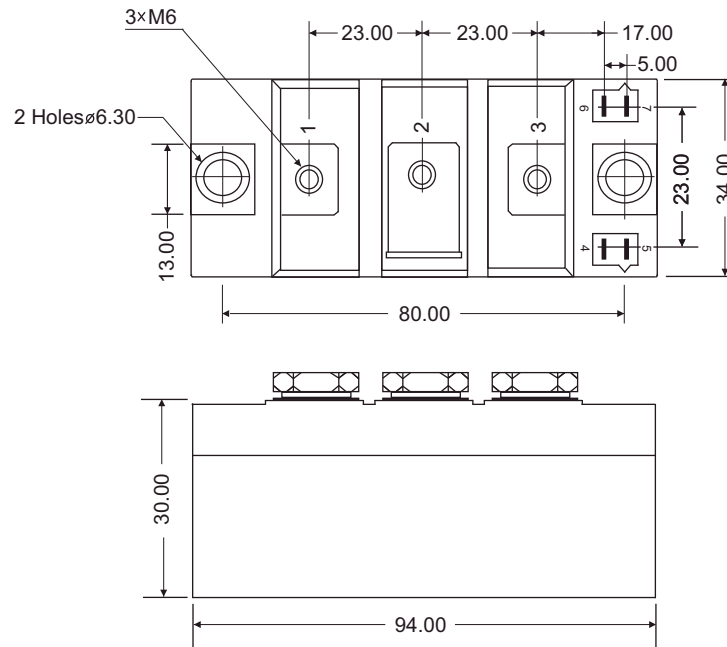
| Voltage Ratings ( $T_A = 25^\circ\text{C}$ , unless otherwise noted) |              |                                                            |                                                                |                                                              |                                                                  |
|----------------------------------------------------------------------|--------------|------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------|------------------------------------------------------------------|
| Type number                                                          | Voltage Code | $V_{RRM}$ , Maximum repetitive peak reverse voltage<br>(V) | $V_{RSM}$ , Maximum non-repetitive peak reverse voltage<br>(V) | $V_{DRM}$ , Maximum repetitive peak off-state voltage<br>(V) | $I_{RRM}$ , Maximum reverse leakage current @ $T_{JMAX}$<br>(mA) |
| NTD172                                                               | 60           | 600                                                        | 700                                                            | 600                                                          | max. 35                                                          |
|                                                                      | 80           | 800                                                        | 900                                                            | 800                                                          |                                                                  |
|                                                                      | 100          | 1000                                                       | 1100                                                           | 1000                                                         |                                                                  |
|                                                                      | 120          | 1200                                                       | 1300                                                           | 1200                                                         |                                                                  |
|                                                                      | 140          | 1400                                                       | 1500                                                           | 1400                                                         |                                                                  |
|                                                                      | 160          | 1600                                                       | 1700                                                           | 1600                                                         |                                                                  |
|                                                                      | 180          | 1800                                                       | 1900                                                           | 1800                                                         |                                                                  |

| Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted) |              |           |                        |
|-------------------------------------------------------------------------------|--------------|-----------|------------------------|
| Parameter                                                                     | Symbol       | Values    | Units                  |
| Maximum average forward current @ $T_J = 85^\circ\text{C}$                    | $I_{T(AV)}$  | 175       | A                      |
| Maximum average RMS forward current                                           | $I_{T(RMS)}$ | 275       | A                      |
| Maximum non-repetitive surge current                                          | $I_{TSM}$    | 5400      | A                      |
| Maximum $I^2t$ for fusing                                                     | $I^2t$       | 145800    | $\text{A}^2\text{s}$   |
| Forward voltage drop                                                          | $V_{TM}$     | max. 1.4  | V                      |
| Critical rate of rise of on-state current                                     | di/dt        | max. 200  | $\text{A}/\mu\text{s}$ |
| Critical rate of rise of off-state voltage                                    | dv/dt        | max. 1000 | $\text{V}/\mu\text{s}$ |
| Gate current required to trigger                                              | $I_{GT}$     | min. 150  | mA                     |
| Gate voltage required to trigger                                              | $V_{GT}$     | min. 2    | V                      |
| Maximum holding current                                                       | $I_H$        | 150       | mA                     |
| Maximum latching current                                                      | $I_L$        | 300       | mA                     |
| Isolation voltage                                                             | $V_{ISO}$    | 3000      | V                      |

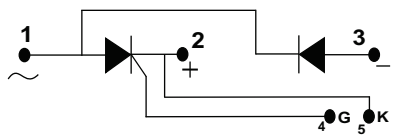
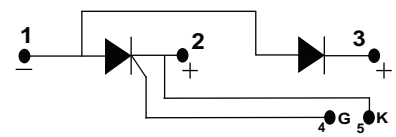
| Thermal & Mechanical Specifications ( $T_A = 25^\circ\text{C}$ unless otherwise noted) |              |              |                           |
|----------------------------------------------------------------------------------------|--------------|--------------|---------------------------|
| Parameter                                                                              | Symbol       | Values       | Units                     |
| Operating junction temperature range                                                   | $T_J$        | -40 to +125  | $^\circ\text{C}$          |
| Storage temperature                                                                    | $T_{stg}$    | -40 to +125  | $^\circ\text{C}$          |
| Thermal resistance, junction to case                                                   | $R_{th(jc)}$ | 0.15         | $^\circ\text{C}/\text{W}$ |
| Mounting torque                                                                        | F            | to heatsink  | $5 \pm 15\%$              |
|                                                                                        |              | to terminals | $5 \pm 15\%$              |
| Weight                                                                                 | W            | 220          | g                         |

## Package Outline

(All dimensions in mm)



## Circuit Configuration

| Circuit Description                 | Configuration Code | Circuit Drawing                                                                       |
|-------------------------------------|--------------------|---------------------------------------------------------------------------------------|
| Series Connection (doubler circuit) | N                  |  |
| Common Anode                        | A                  |  |

## Ordering Table

---

| <i>NTD</i> | <i>172</i> | <i>N</i> | <i>160</i> |
|------------|------------|----------|------------|
| 1          | 2          | 3        | 4          |

1 – Power Module

- > DD = Diode-Diode
- > TD = Thyristor-Diode
- > TT = Thyristor-Thyristor

2 – Current Rating =  $I_{T(AV)}$

3 – Circuit Configuration (see Table)

4 – Voltage Code (see Voltage Ratings table)